SimplyShade

Lanai Pro

Starlight Auto Tilt

11' Octagon / SSUM81SL-11 9' Octagon / SSUM81SL-09




Instruction Manual

Thank you for your purchase of SimplyShade's Lanai Pro Starlight Auto Tilt Umbrella.

Please remove all contents from the package, inspect and review checklist. CAUTION: To reduce personal injury and damage to your umbrella, read and follow this assembly and operation guide We recommend a two-person team for assembly and disassembly. Save information for future reference.

LANAI PRO STARLIGHT AUTO TILT CHECKLIST

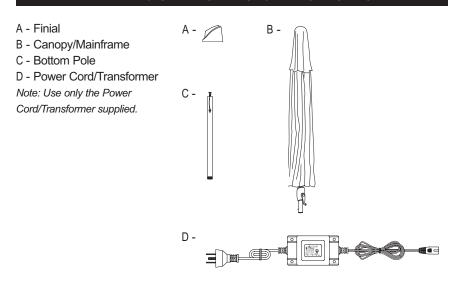


STEP 1 Set Up


Carefully remove umbrella from box. Attach finial to top of canopy/mainframe.




Connect bottom pole plug to canopy/mainframe plug. Twist plug clockwise together to secure connection.

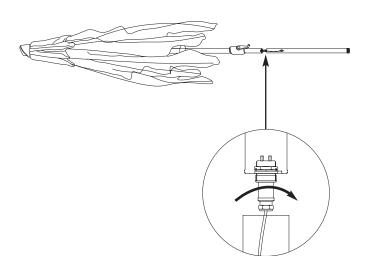

Insert bottom pole into canopy/mainframe pole. Line up button with hole and snap into place.



Turn umbrella in upright position. Insert bottom pole into free standing base or through table top. Insert power supply/transformer into umbrella pole. Connect other end of power supply/transformer into wall outlet.

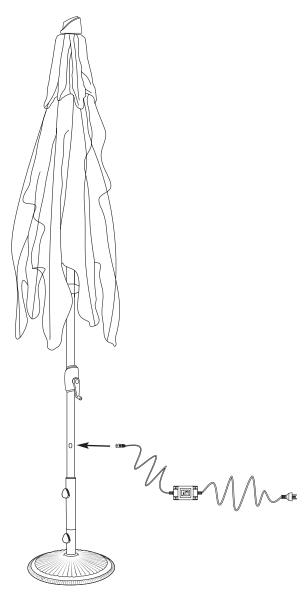


Note: The transformer output power is 12V. It is normal for transformer to get warm after long period of use. Avoid sun on power supply/transformer to increase lifetime use.

Be sure not to drop transformer. Note: Use only the Power Cord/Transformer supplied.

STEP 2 Operating Umbrella

Crank handle clockwise to open umbrella to its fully open position. To turn umbrella rib lights on or off, press on/off switch located on crank housing.

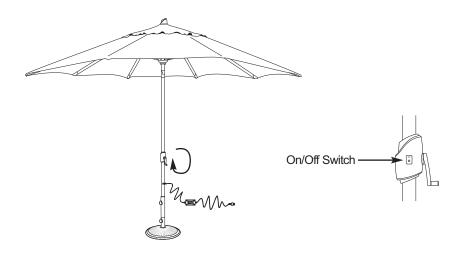


To tilt, continue to turn the crank to desired position.




STEP 3 Closing Umbrella

Turn crank handle in counter clockwise direction to bring umbrella back to a horizontal position. Turn umbrella off by clicking switch to off position.



To close, turn crank handle in counter-clockwise direction to close umbrella.



Note: During disassembly, it is important to loosen knob of plug *inside* umbrella poles **first**, then remove bottom pole from mainframe/canopy. If not, the wire will be split and result in damage to lighting.

WARRANTY:

The manufacturer warrants that this umbrella, when subject to normal and proper use, will be free from manufacturing defects for a period of one year from the original date of purchase. Should any defect occur during the specified time period, the manufacturer will repair, replace, or provide replacement parts, at its own option. Limited warranty against fabric fading, based on fabric grade. Warranty is not transferable.

We will not warrant any claim coverage unless both the original sales receipt and request form are sent to us. Any items that are returned for warranty or non warranty purposes must be issued a Return Authorization Number. Only

upon issuance of an RA# and inspection by our QC department will credit or replacement of umbrella be issued. It is the customer's responsibility to pay the freight on return products or replacement parts. ALL RETURNED ITEMS MUST INCLUDE THE RA# CLEARLY WRITTEN ON THE RETURN PACKAGE or package will be refused by our warehouse personnel.

NOTE: Damages and failure caused by improper use due to neglect of reasonable and necessary care are not covered by this warranty.

Additionally, acts of nature (including but not limited to wind, hurricanes, tornadoes, and storms) are not covered by this warranty.

SAFETY PRECAUTIONS:

- Close and store the umbrella in windy conditions or when a storm approaches.
 Never allow the umbrella to flap in the wind; this could damage the canopy.
- Do not leave open umbrella unattended. If damage occurs, this is not covered by the warranty.
- When adjusting the umbrella, make sure that no person(s) or item(s) are close to the umbrella. This is important to prevent injury or material damage.

CARE AND MAINTENANCE:

- When not in use, close and cover umbrella with a protective cover (not included).
- · Allow a wet canopy to dry while in open position.
- If necessary, clean the fabric with lukewarm water, mild detergent, and a sponge.
- Wipe sliding marks on the aluminum poles with a damp cloth.

Storage:

- Store in a dry, protective place.
- · Any visible defects must be repaired by a professional.

After the Winter:

- Areas subject to turning and sliding can be treated with a non-staining lubricant spray (silicone-based).
- Check the condition and function of the umbrella. Any defects must be repaired by a professional.

SimplyShade